


MANIFOLD ASSEMBLY

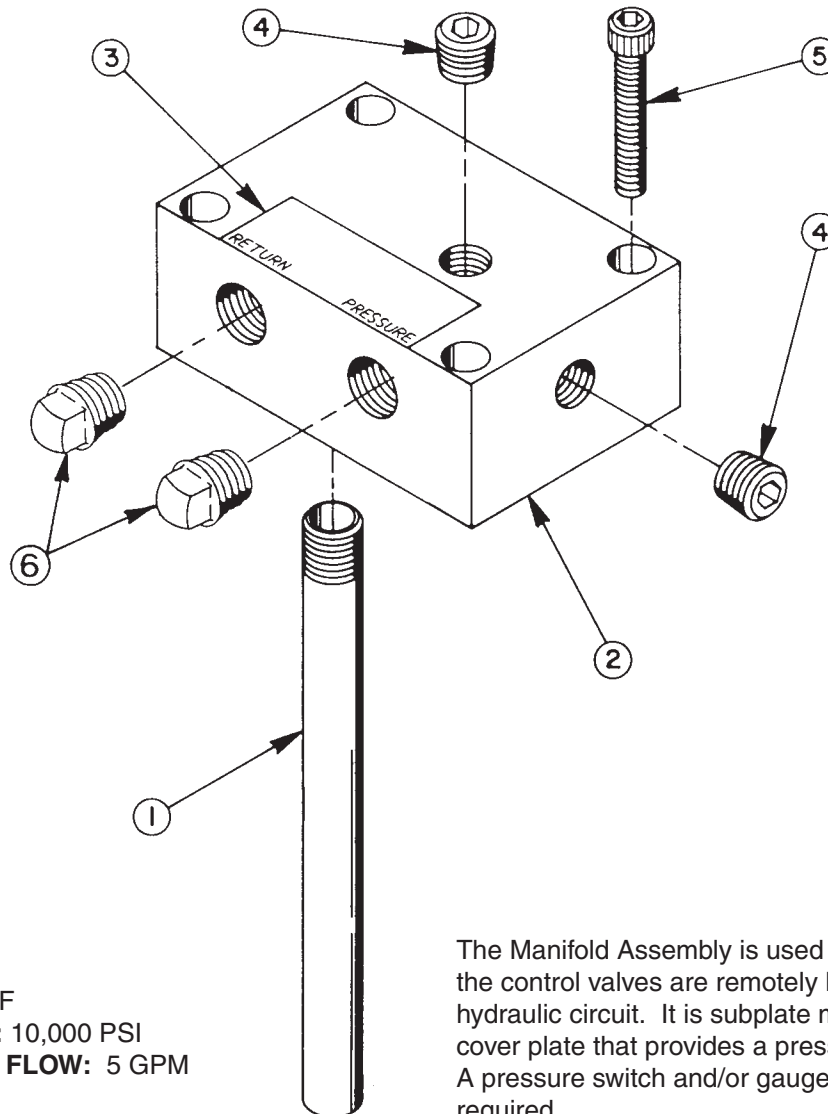

SPECIFICATIONS

PORT SIZES: 3/8" NPTF
MAXIMUM PRESSURE: 10,000 PSI
MAX. RECOMMENDED FLOW: 5 GPM

The Manifold Assembly is used on a power unit when the control valves are remotely located in the hydraulic circuit. It is subplate mounted on the pump cover plate that provides a pressure and return port. A pressure switch and/or gauge may be attached if required.

Item No.	Part No.	No. Req'd	Description
1	200609	1	Drain Line
2	45911	1	Manifold Body
3	211167	1	Decal
4	10479	2	Pipe Plug (1/4 NPTF)
5	10022	4	Cap Screw (1/4-20 UNC X 1-1/2 Lg.)
6	11127	2	Pressure Plug

Note: Shaded areas reflect last revision(s) made to this form.

Sheet No. 1 of 1

Rev. 2 Date: 25 Oct. 1996