

SOLLEVATORI PNEUMATICI PNEUMATIC JACKS

112 132 1123



YAK 112 - YAK 1123

Sollevatori pneumatici costituiti da una membrana ad alta resistenza e da una guida telescopica interna. Sono dotati di un dispositivo d'arresto a fine corsa e di una valvola di sicurezza che li rendono assolutamente affidabili in caso di carichi eccessivi. Silenziosi, semplici e leggeri, rappresentano il prodotto ideale per gommisti e carrozzieri in funzione della possibilità di utilizzo anche sui ponti sollevatori. Discesa automatica. Doppia valvola di tenuta.

YAK 112 - YAK 1123

Pneumatically controlled jacks consisting of a highly resistant diaphragm and internal telescopic guide. These jacks are fitted with a limit stop device as well as a safety valve making them absolutely reliable in the case of excessive loads. Silent, simple and lightweight, they are ideal for tyre repairers and bodywork shops in view of the fact they can also be used on column lifts. Automatic lowering. Double valve system.

YAK 132

Sollevatori pneumatici costituiti da una membrana ad alta resistenza e da una guida telescopica interna. Sono dotati di un dispositivo d'arresto a fine corsa e di una valvola di sicurezza che li rendono assolutamente affidabili in caso di carichi eccessivi. Silenziosi, semplici e leggeri, rappresentano il prodotto ideale per gommisti e carrozzieri in funzione della possibilità di utilizzo anche sui ponti sollevatori.


YAK 132

Pneumatically controlled jacks consisting of a highly resistant diaphragm and internal telescopic guide. These jacks are fitted with a limit stop device as well as a safety valve making them absolutely reliable in the case of excessive loads. Silent, simple and lightweight, they are ideal for tyre repairers and bodywork shops in view of the fact they can also be used on column lifts.

	YAK 112	YAK 132	YAK 1123
Portata Capacity	2 t 2.2 ton	2 t 2.2 ton	3 t 3.3 ton
Peso netto Net weight	16,5 kg 36 lb	14 kg 31 lb	18 kg 40 lb
Pressione di alimentazione Working air pressure	8-10 bar 116-145 psi	8-10 bar 116-145 psi	8 bar 116 psi
Consumo d'aria Air waste	50 nl/min	50 nl/min	70 nl/min


Gli accessori opzionali compatibili sono elencati all'ultima pagina.

Compatible optional accessories can be found on the last page.

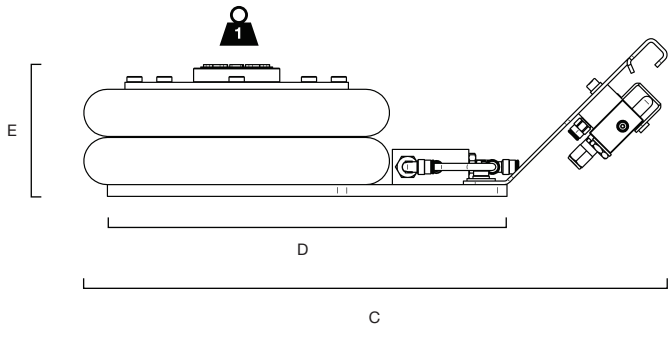


	YAK 112	YAK 132	YAK 1123
C	492 mm 19.37 in	415 mm 16.34 in	492 mm 19.37 in
D	250 mm 9.84 in	250 mm 9.84 in	340 mm 13.38 in
E	112-340 mm 4.41-13.39 in	132-326 mm 5.2-12.83 in	112-340 mm 4.41-13.39 in
	2,0 t 2.2 ton	2,0 t 2.2 ton	3,0 t 3.3 ton


YAK 112

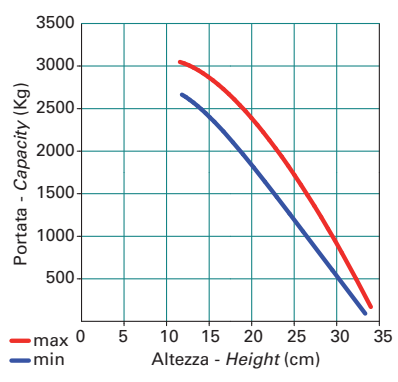

YAK 132

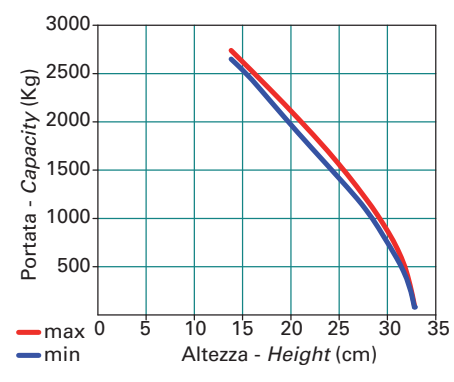

YAK 1123

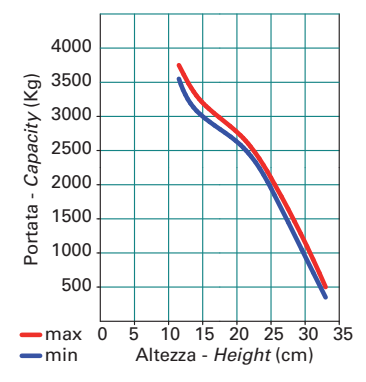

	YAK112	YAK132	YAK1123
	•	•	•
	•	•	•
	•	•	•
	•	•	•
	•	•	•
	•	•	•
	•	•	•

SOLLEVATORI PNEUMATICI PNEUMATIC JACKS

143 203



YAK 143

Sollevatori pneumatici costituiti da una membrana ad alta resistenza e da una guida telescopica interna. Sono dotati di un dispositivo d'arresto a fine corsa e di una valvola di sicurezza che li rendono assolutamente affidabili in caso di carichi eccessivi. Silenziosi, semplici e leggeri, rappresentano il prodotto ideale per gommisti e carrozzieri in funzione della possibilità di utilizzo anche sui ponti sollevatori. Discesa automatica. Doppia valvola di tenuta.

YAK 203

Sollevatori pneumatici costituiti da una membrana ad alta resistenza e da una guida telescopica interna. Sono dotati di un dispositivo d'arresto a fine corsa e di una valvola di sicurezza che li rendono assolutamente affidabili in caso di carichi eccessivi. Silenziosi, semplici e leggeri, rappresentano il prodotto ideale per gommisti e carrozzieri in funzione della possibilità di utilizzo anche sui ponti sollevatori.

YAK 143

Pneumatically controlled jacks consisting of a highly resistant diaphragm and internal telescopic guide. These jacks are fitted with a limit stop device as well as a safety valve making them absolutely reliable in the case of excessive loads. Silent, simple and lightweight, they are ideal for tyre repairers and bodywork shops in view of the fact they can also be used on column lifts. Automatic lowering. Double valve system.


YAK 203


Pneumatically controlled jacks consisting of a highly resistant diaphragm and internal telescopic guide. These jacks are fitted with a limit stop device as well as a safety valve making them absolutely reliable in the case of excessive loads. Silent, simple and lightweight, they are ideal for tyre repairers and bodywork shops in view of the fact they can also be used on column lifts.

	YAK 143	YAK 203
Portata Capacity	2 t 2.2 ton	2 t 2.2 ton
Peso netto Net weight	20 kg 44 lb	17 kg 37 lb
Pressione di alimentazione Working air pressure	8-10 bar 116-145 psi	8-10 bar 116-145 psi
Consumo d'aria Air waste	50 nl/min	70 nl/min


Gli accessori opzionali compatibili sono elencati all'ultima pagina.

Compatible optional accessories can be found on the last page.

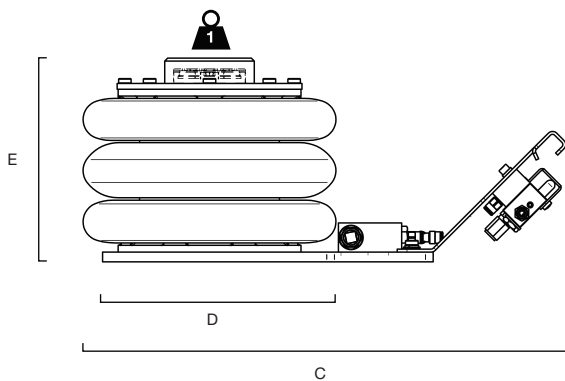


	YAK 143	YAK 203
C	462 mm 18.2 in	415 mm 14.34 in
D	260 mm 10.2 in	250 mm 9.84 in
E	140-500 mm 5.5-19.7 in	205-490 mm 8.07-19.29 in
	2,0 t 2.2 ton	2,0 t 2.2 ton

YAK 143

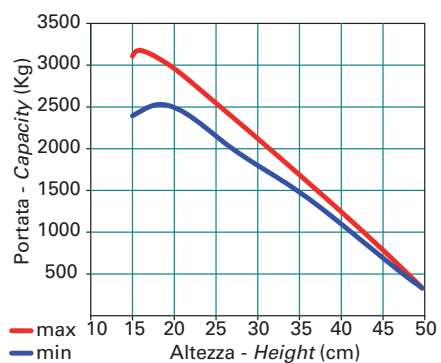

YAK 203

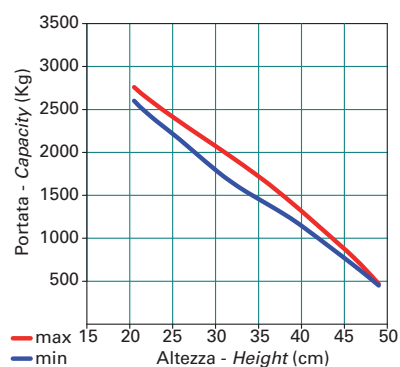

	YAK 143	YAK 203
	•	•
	•	•
	•	•
	•	•