



SPX Corporation
5885 11th Street
Rockford, IL 61109-3699 USA

Internet Address:
<http://www.powerteam.com>
Tech. Services: (800) 477-8326
Fax: (800) 765-8326
Order Entry: (800) 541-1418
Fax: (800) 288-7031


SPX Corporation
655 Eisenhower Drive
Owatonna, MN 55060-0995 USA
Phone: (507) 455-7000
Tech. Services: (800) 533-6127
Fax: (800) 955-8329
Order Entry: (507) 455-1480
Fax: (800) 283-8665
International Sales: (507) 455-7223
Fax: (507) 455-7746

Parts List for:

9623
30776
V38PR
Y-30776

ADJUSTABLE, REMOTE MOUNTED PRESSURE REGULATOR VALVE


Max. Capacity: 10,000 PSI

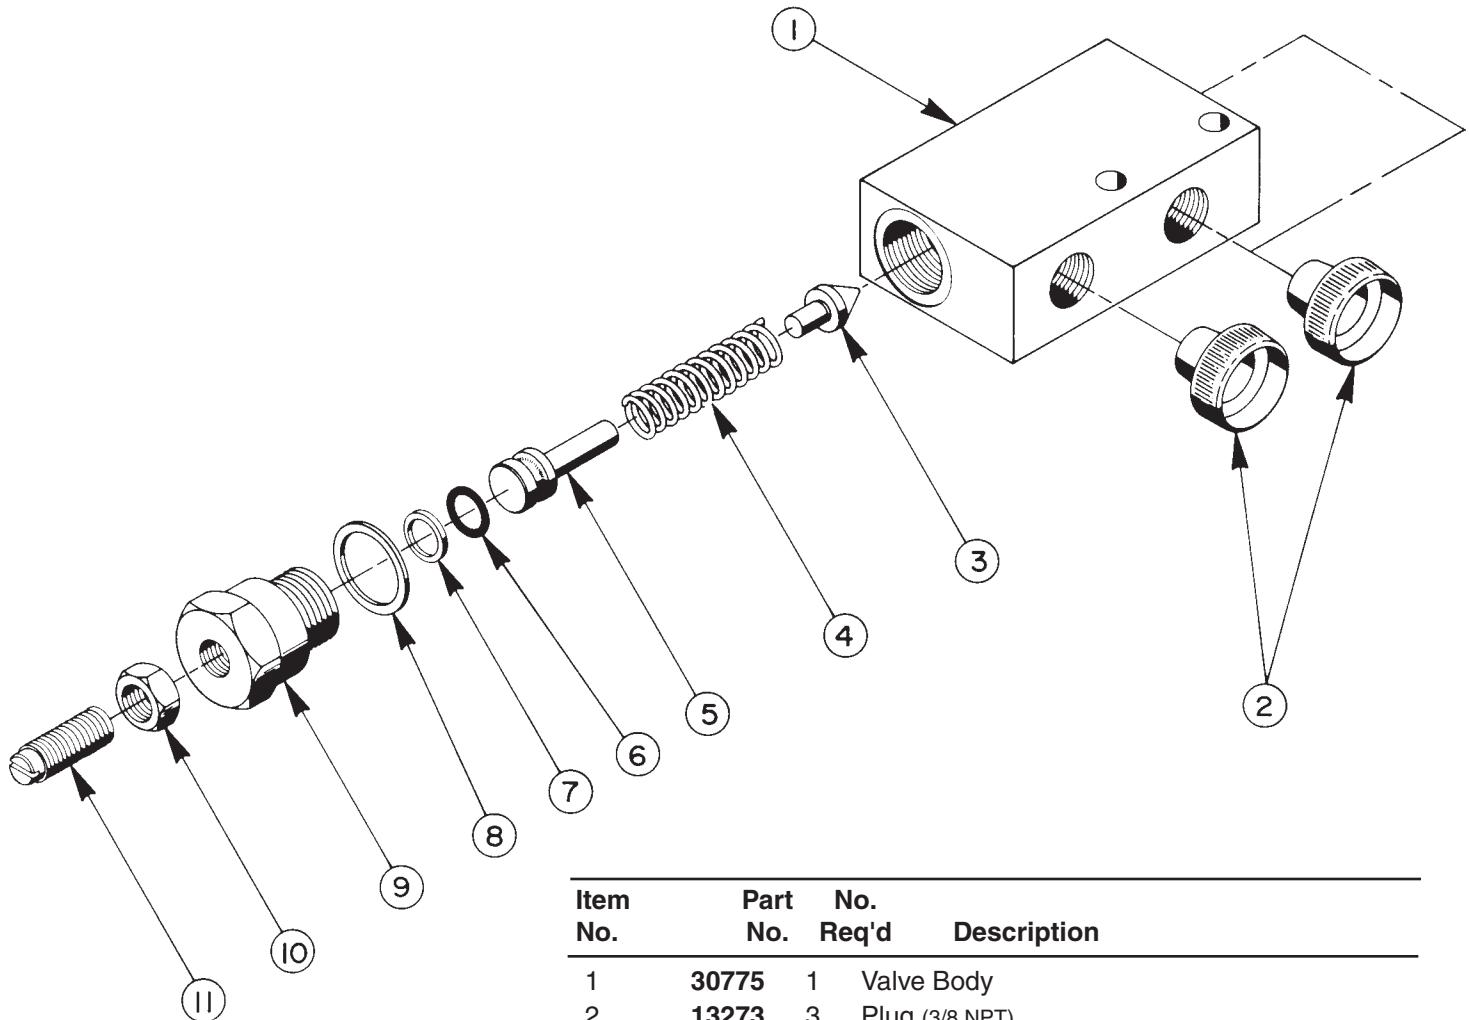

Item No.	Part No.	No. Req'd	Description
1	30775	1	Valve Body
2	13273	3	Plug (3/8 NPT)
3	21046	1	Valve Stem
4	10495	1	Compression Spring (1/2 O.D. X 1-5/8 Lg.)
5	21306	1	Spring Guide
6	10268	1	O-ring (1/2 X 3/8 X 1/16, -012)
7	11863	1	Backup Washer (Teflon -012)
8	10263	1	Copper Washer (1" X .765 X 1/32)
9	21305	1	Valve Cap
10	10386	1	Hex Nut
11	22362	1	Adjusting Screw

SPECIFICATIONS

A spring-loaded, direct-acting relief valve which can be easily adjusted for actuation from 1,000 PSI to 10,000 PSI. Designed for remote locations in hydraulic circuits where maximum pressure requirements are less than the setting of the basic overload valve setting in the pump.

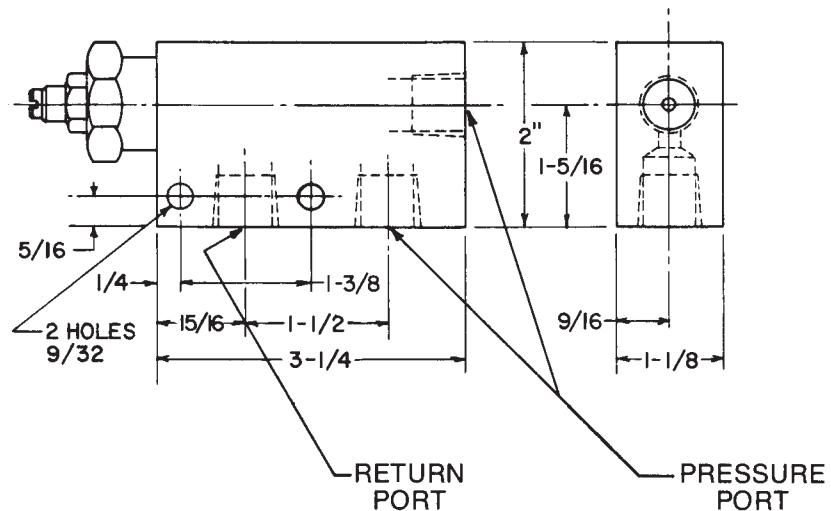

PORT SIZES: 3/8" NPTF
MAXIMUM PRESSURE: 10,000 PSI
MAX. RECOMMENDED FLOW: 5 GPM

Refer to any operating instructions included with this product for detailed information about operation, testing, disassembly, reassembly, and preventive maintenance.

Items found in this parts list have been carefully tested and selected. **Therefore: Use only genuine replacement parts!**

Additional questions can be directed to our Technical Services Department.